



WEMCO[®] Self-Primer[™]




440 West 800 South • P.O. Box 209
Salt Lake City, UT 84110-0209
Tel: 801-359-8731 • Fax: 801-355-9303
www.weirsp.com • info@weirsp.com



Pump Size	8" x 8" • 203 mm x 203 mm ANSI/DIN
Pump Casing	Ductile Iron
Operating Pressure	Maximum 90 psi (598 kP)
Impeller	Open type, two vane. Material - Ductile Iron Pumps 3" (76.2 mm) solids
Impeller Shaft	17-4PH SST
Wear Plate, Replaceable	Hardened steel
Cover Plate	Removable/Adjustable Gray Iron 30
Flap Valve	Neoprene with steel reinforcing ring
Bearing Housing	Ductile Iron
Seal Plate	Ductile Iron
Shaft Sleeve	SST 316
Radial Bearing	Open single ball
Thrust Bearing	Open double ball
Bearing/Seal Cavity Lubrication	SAE No. 30 oil
Flanges	125# Ductile iron ANSI or DIN
Gaskets	Buna-N, compressed synthetic fibers, vegetable fiber, PTFE, cork, and rubber
O-Rings	Buna-N - Teflon coated
Hardware	Plated steel
Pressure Release Valve	Brass
Oil Level Sight Guages	Bearing and Seal Cavity

WEMCO[®] Self-Primer[™] Pump Details

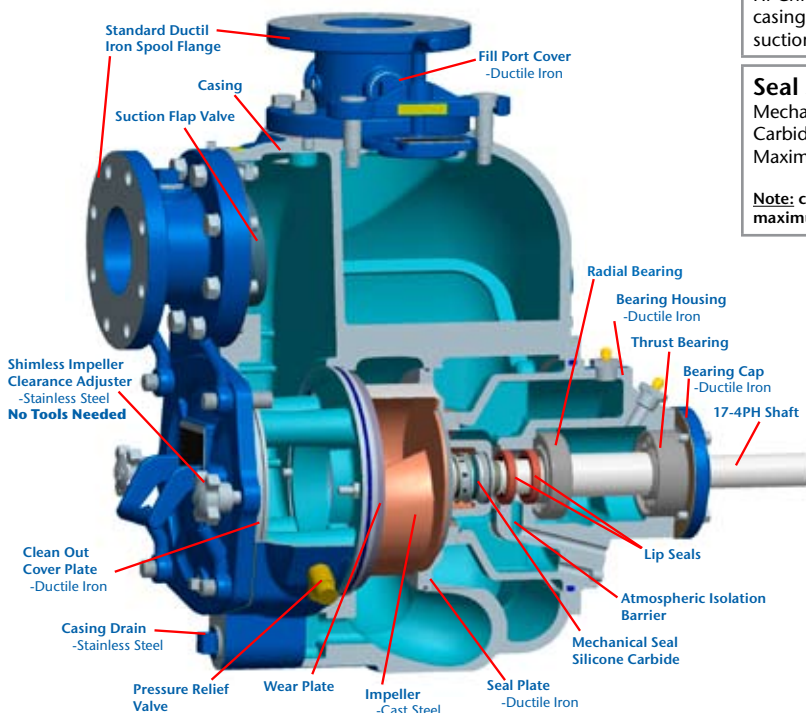

Optional Equipment and Materials


Hi-Chrome, 316 SST, CD4MCU. Automatic air release valve, 120V/240V casing heater. High pump temperature shutdown kit, NPT & DIN standard suction and discharge flanges.

Seal Specifications

Mechanical oil-lubricated, double floating, self-aligning seal. Silicon Carbide rotation and stationary faces. Stainless steel metal components. Maximum temperature of liquid pumped 180°F/83°C.

Note: consult factory for applications exceeding maximum pressure and/or temperature indicated.

Seal Detail View

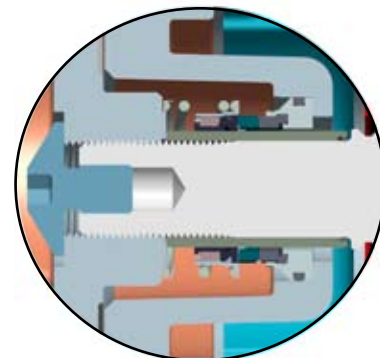

EXCELLENT
ENGINEERING
SOLUTIONS
WEHR
CLEAR LIQUID

Pump Specification: WSP8A



WEMCO[®] Self-Primer[™]

Pump Size	8"x8"/203 mm x203 mm
Net Weight	1300 lbs./590 KG.
Shipping Weight	1400 lbs./635 KG
Export Crate	48 Cu. Ft./1.4 CU. M
Spool Flange	Add 49 lbs/22.3 KG. each

